



## PROBLEM 1.14

A couple  $M$  of magnitude  $1500\text{ N} \cdot \text{m}$  is applied to the crank of an engine. For the position shown, determine (a) the force  $P$  required to hold the engine system in equilibrium, (b) the average normal stress in the connecting rod  $BC$ , which has a  $450\text{-mm}^2$  uniform cross section.

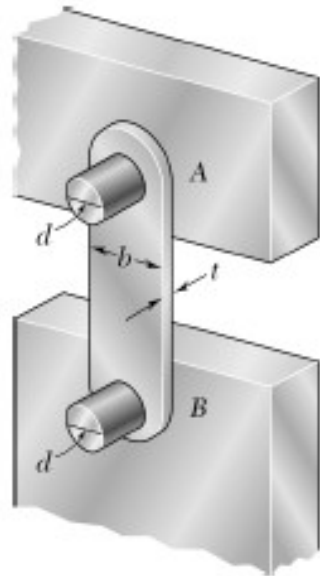


### PROBLEM 1.26

Link  $AB$ , of width  $b = 50$  mm and thickness  $t = 6$  mm, is used to support the end of a horizontal beam. Knowing that the average normal stress in the link is  $-140$  MPa, and that the average shearing stress in each of the two pins is  $80$  MPa, determine (a) the diameter  $d$  of the pins, (b) the average bearing stress in the link.

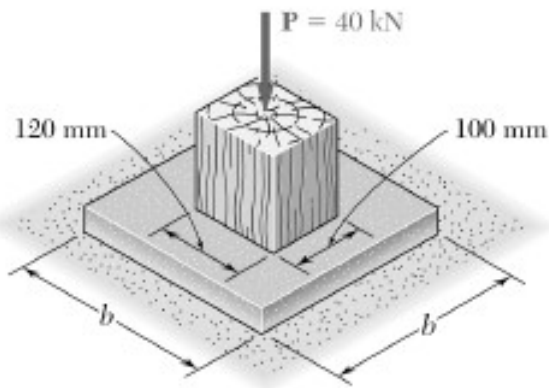


### PROBLEM 1.22

A 40-kN axial load is applied to a short wooden post that is supported by a concrete footing resting on undisturbed soil. Determine (a) the maximum bearing stress on the concrete footing, (b) the size of the footing for which the average bearing stress in the soil is 145 kPa.

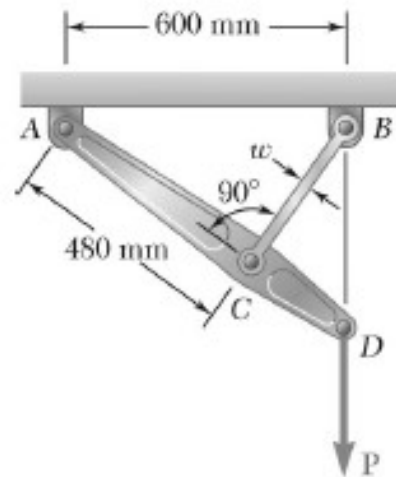

### PROBLEM 1.37

Link  $BC$  is 6 mm thick, has a width  $w = 25$  mm, and is made of a steel with a 480-MPa ultimate strength in tension. What was the safety factor used if the structure shown was designed to support a 16-kN load  $P$ ?

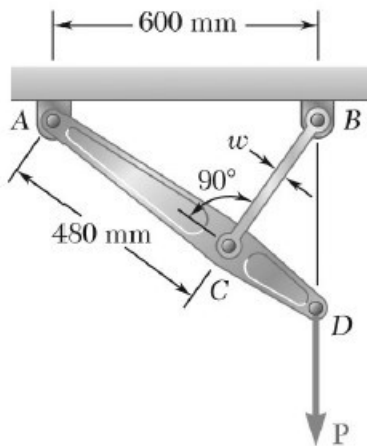

### PROBLEM 1.38

Link  $BC$  is 6 mm thick and is made of a steel with a 450-MPa ultimate strength in tension. What should be its width  $w$  if the structure shown is being designed to support a 20-kN load  $P$  with a factor of safety of 3?



### PROBLEM 1.47

Three steel bolts are to be used to attach the steel plate shown to a wooden beam. Knowing that the plate will support a 110-kN load, that the ultimate shearing stress for the steel used is 360 MPa, and that a factor of safety of 3.35 is desired, determine the required diameter of the bolts.